

Textile


Nonwoven

Coating &
Converting

Paper

Extrusion

Laser Shadow Sensor DMS

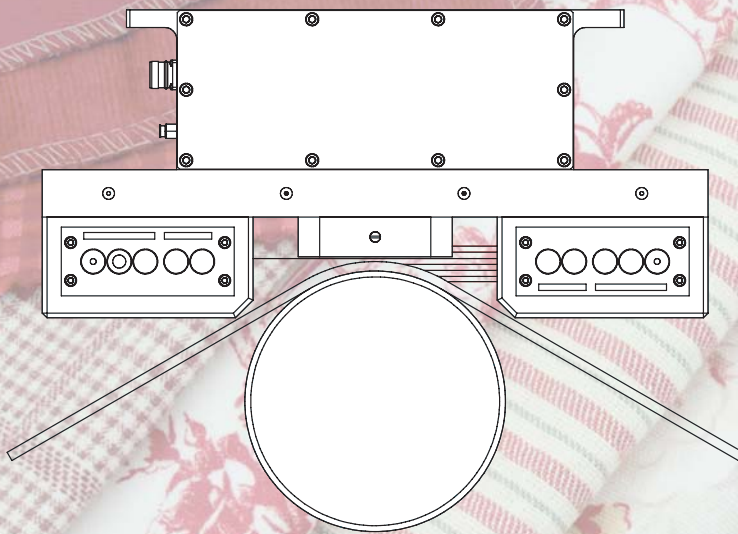

Laser Shadow

non-contact

non-radiation

0,1 - 15mm

Measuring range 0.1 - 15 mm
Measuring gap max. 20 mm
Measuring accuracy $\leq 8 \mu\text{m}$
Reference roller min. \varnothing 220 mm
Roller material Aluminium

Max. wrap angle 60°
Temp. range 0 - 50°C
Traversing speed 5 - 300 mm/s
adjustable

